


Nastavenie D-Link DIR-300 na režim Access Point (Prístupový bod)

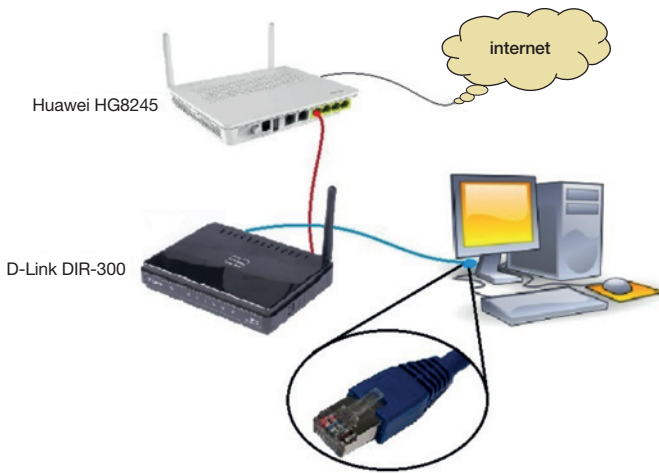


Zapojenie zariadení

Poznámka: zariadenie je možné použiť aj ako switch (prepínač).

1. Zariadenie je nutné nastaviť do výrobných nastavení stlačením a podržaním (aspoň 7 sekúnd) tlačidla RESET (pomocou ceruzky, pera, ...). Pripojte ethernetový (sieťový) kábel do jedného z LAN portov na DIR-300 a druhý koniec kábla do PC/notebooku (pozri obrázok vyššie). Kábel s pripojením na zariadenie Huawei HG8245 zapojte do WAN portu (nie do LAN portov!).

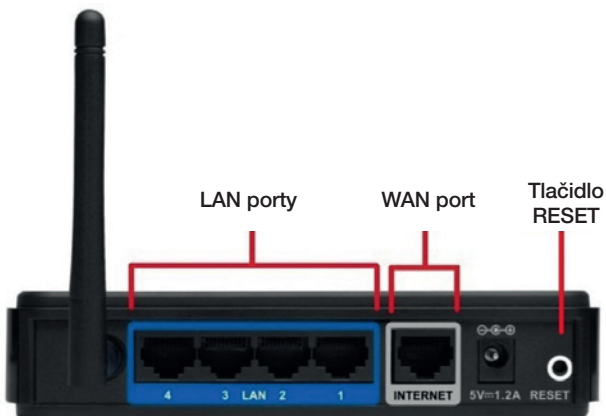

2. V internetovom prehliadači zadajte IP adresu zariadenia (uvedená na zariadení, príp. v manuáli) a prihláste sa pomocou administrátorských údajov (uvedené na zariadení, príp. v manuáli) kliknutím na tlačidlo Log In.

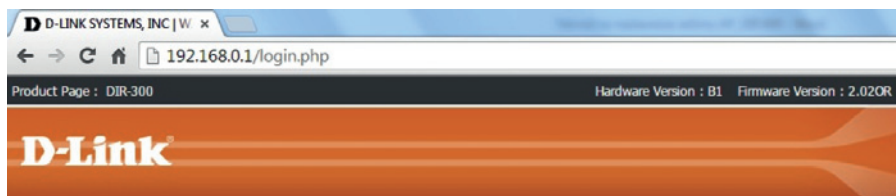

LOGIN

Log in to the router:

User Name

Password

3. Nastavenie bezdrôtového pripojenia (WiFi): v ľavej časti ponuky kliknite na možnosť Wireless Setup a potom na možnosť Manual Wireless Connection Setup.

Product Page : DIR-300 **Hardware Version : B1** **Firmware Version : 2.02OR**

D-Link

DIR-300 // SETUP ADVANCED MAINTENANCE STATUS HELP

Internet Setup
Wireless Setup
LAN Setup
Time and Date
Parental Control
Internet Offline
Reboot

WIRELESS CONNECTION

There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup Wizard or you can manually configure the connection.

Please note that changes made in this section will also need to be duplicated on your wireless clients and PCs.

WIRELESS CONNECTION SETUP WIZARD

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Wireless Router to the Internet, click on the button below.

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

MANUAL WIRELESS CONNECTION OPTIONS

If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

Helpful Hints...

- If you are new to wireless networking and have never configured a wireless router before, click on **Wireless Connection Setup Wizard** and the router will guide you through a few simple steps to get your wireless network up and running.
- If you consider yourself an advanced user and have configured a wireless router before, click **Manual Wireless Connection Setup** to input all the settings manually.

4. Zapnite bezdrôtovú sieť zaškrtnutím možnosti Enable Wireless. Pre vašu novú bezdrôtovú sieť nastavte rovnaký názov a heslo, ako má vaša pôvodná bezdrôtová sieť na zariadení Huawei HG8245 (možnosť Wireless Network Name a pre heslo možnosť Network Key). Ďalej nastavte typ šifrovania vašej siete podľa obrázka na AES. Nastavenia uložíte kliknutím na možnosť Save Settings.

Internet Online

Reboot

Save Settings Don't Save Settings

WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA)

Enable:

Current PIN: **56548501**

Generate New PIN Reset PIN to Default

Wi-Fi Protected Status: Enabled / Configured

Reset to Unconfigured Add Wireless Device with WPS

WIRELESS NETWORK SETTINGS 1.

Enable Wireless: Always New Schedule

2. Wireless Network Name: **HUAWEI-s1D31D** (Also called the SSID)

Enable Auto Channel Selection:

Wireless Channel: 6

Transmission Rate: Best (automatic) (Mbit/s)

WMM Enable: (Wireless QoS)

Enable Hidden Wireless: (Also called the SSID Broadcast)

WIRELESS SECURITY MODE

Security Mode: Enable WPA/WPA2 Wireless Security (enhanced)

WPA/WPA2

WPA/WPA2 requires stations to use high grade encryption and authentication.

3. Cipher Type: **AES**

PSK / EAP: PSK

4. Network Key: **wT4@n20o**
(8~63 ASCII or 64 HEX)

5. Save Settings Don't Save Settings

Wireless card support this feature or uses a certified Windows Vista driver in order to take advantage of this feature.

- Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information.
- Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device.
- If you have enabled Wireless Security, make sure you write down the WEP Key or Passphrase that you have configured. You will need to enter this information on any wireless device that you connect to your wireless network.

5. V ľavej časti kliknite na možnosť Internet Setup a tam kliknite na Manual Internet Connection Setup.

The screenshot shows the D-Link DIR-300 web interface. The top navigation bar includes 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar contains 'Internet Setup', 'Wireless Setup', 'LAN Setup', 'Time and Date', 'Parental Control', 'Internet Online', and 'Reboot'. The main content area is titled 'CONNECTION' and contains the 'INTERNET CONNECTION SETUP WIZARD' section. A red arrow points to the 'Internet Setup' menu item. Below the wizard instructions, the 'Manual Internet Connection Setup' button is highlighted with a red box and a red arrow labeled '2.'.

D-Link

DIR-300

SETUP **ADVANCED** **MAINTENANCE** **STATUS** **HELP**

Internet Setup **CONNECTION**

Wireless Setup

LAN Setup

Time and Date

Parental Control

Internet Online

Reboot

If you are configuring the device for the first time, we recommend that you click on the Internet Connection Setup Wizard button and follow the instructions on the screen. If you wish to modify or configure the device settings manually, click the Manual Internet Connection Setup button.

INTERNET CONNECTION SETUP WIZARD

If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below.

Internet Connection Setup Wizard

Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

MANUAL INTERNET CONNECTION OPTIONS

If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.

Manual Internet Connection Setup **2.**

Helpful Hints...

- If you are new to networking and have never configured a router before, click on **Internet Connection Setup Wizard** and the router will guide you through a few simple steps to get your network up and running.
- If you consider yourself an advanced user and have configured a router before, click **Manual Internet Connection Setup** to input all the settings manually.

6. Zaškrtnite možnosť Enabled Access Point Mode a nastavenie uložte (tlačidlo Save Settings).

Product Page : DIR-300 Hardware Version : B1 Firmware Version : 2.02OR

D-Link

DIR-600 // SETUP ADVANCED TOOLS STATUS SUPPORT

WAN

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, and L2TP. If you are unsure of your connection method, please contact your Internet Service Provider.

Note : If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Save Settings Don't Save Settings

ACCESS POINT MODE

Use this to disable NAT on the router and turn it into an Access Point.

Enabled Access Point Mode **1.**

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is : Dynamic IP (DHCP)

DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE :

Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.

Host Name : dlinkrouter

Primary DNS Server :

Secondary DNS Server : (optional)

MTU : 1500

MAC Address : Clone Your PC's MAC Address

2.

Save Settings Don't Save Settings

Helpful Hints...

- Internet Connection:** When configuring the router to access the Internet, be sure to choose the correct Internet Connection Type from the drop down menu. If you are unsure of which option to choose, please contact your Internet Service Provider (ISP).
- Support:** If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.

7. Nastavenia budú uložené a zariadenie sa reštartuje.

DEVICE MODE

The device is changing to AP mode.

The device will dynamically get an IP address from DHCP server.


Please check the DHCP server for the IP address of the device.

Or use UPnP tools to discover the device.

8. Ethernetový kábel, ktorý prepája váš PC so zariadením D-Link DIR 300, odpojte a následne zapojte, aby zariadenie Huawei HG8245H prideliло vášmu PC novú IP adresu a pokračujte nastavením zariadenia Huawei HG8245H.

Nastavenie zariadenia Huawei HG8245H



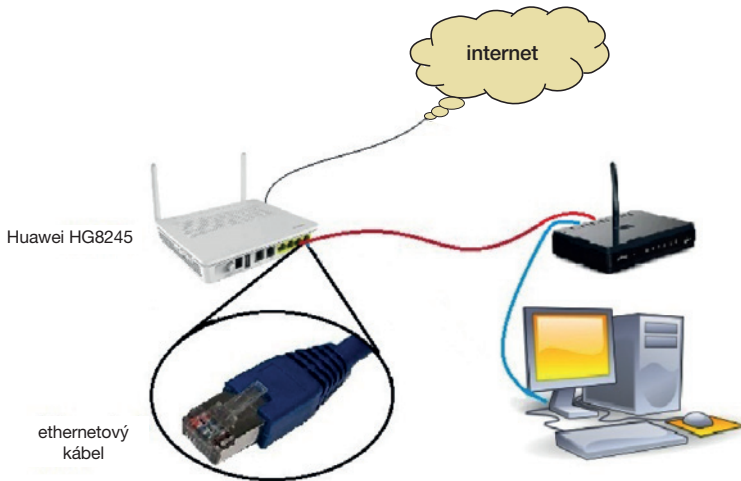


Zapojenie zariadení

1. V internetovom prehliadači zadajte IP adresu zariadenia (uvedená na zariadení, príp. v manuáli) a prihláste sa pomocou administrátorských údajov (uvedené na zariadení, príp. v manuáli) kliknutím na tlačidlo Login.



- Po prihlásení v hornej časti kliknite na možnosť **Status** a potom na možnosť **User Device Information**, ktorú nájdete v ľavej časti ponuky. Tu sa zobrazia všetky zariadenia pripojené na zariadenie HG8245. Nájdite riadok s názvom **dlinkrouter** alebo riadok s typom vášho D-Link zariadenia (napr. DIR-300, DIR-600, ...). Na konci tohto riadka kliknite na možnosť **Network Application** (na obrázku zvýraznená v modrom rámečku). Ak sa zariadenie s názvom dlinkrouter alebo zariadenie typu D-Link nenachádzajú v tabuľke, tak počkajte pár minút, kým sa zariadenia spárujú.

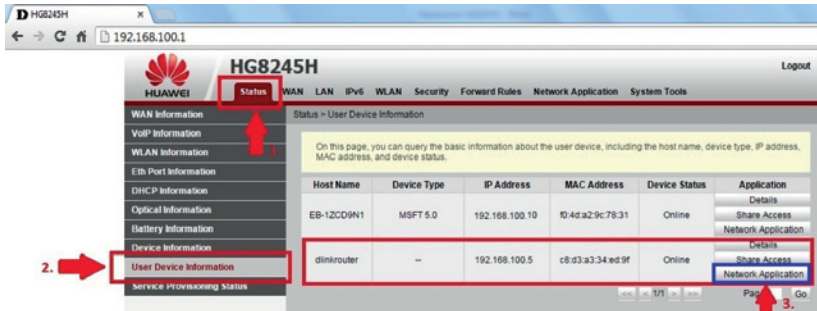

- Tu kliknite na možnosť **Configure Reserved DHCP IP Addresses**.



- V kolónke zmeňte pôvodnú hodnotu na **192.168.100.130** tak, ako je na obrázku, a nastavenia uložte kliknutím na tlačidlo **Apply**. Zariadenie reštartujte odpojením a následným pripojením k elektrickej sieti.

